

SUBMITTAL DATA convector model FL


Model FL Flat-Top Floor Mounted

Job Name and Location _____ Date _____

Architect _____ Engineer _____ Sheet _____ of _____

Contractor _____ Order No. _____

Submitted by _____

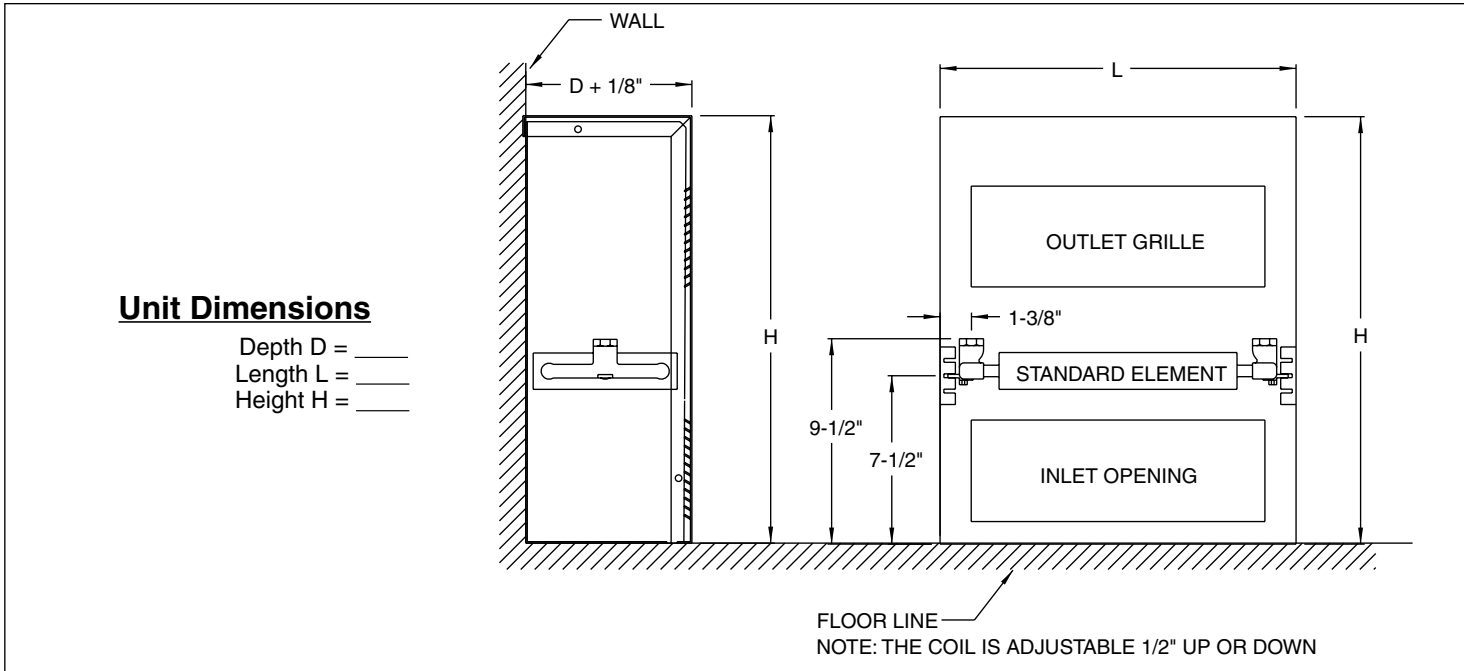

Unit Dimensions
 Depth D = _____
 Length L = _____
 Height H = _____

Heating Element

Copper tube mechanically fastened to 0.010" aluminum fins.

- Element to have a nominal depth of:
 4" w/ 2 tubes 6" w/ 3 tubes 6" w/ 4 tubes

Standard cast brass headers with top and bottom connections

- Optional reverse header connections

Enclosure Specifications

Dimensions specified above

Enclosure metal gauge:

- | | |
|--|---|
| <input type="checkbox"/> 20 ga. liner, 18 ga. front (Standard) | <input type="checkbox"/> 20 ga. liner, 14 ga. front |
| <input type="checkbox"/> 18 ga. liner, 18 ga. front | <input type="checkbox"/> 18 ga. liner, 14 ga. front |
| <input type="checkbox"/> 20 ga. liner, 16 ga. front | <input type="checkbox"/> 16 ga. liner, 14 ga. front |
| <input type="checkbox"/> 18 ga. liner, 16 ga. front | <input type="checkbox"/> 14 ga. liner, 14 ga. front |
| <input type="checkbox"/> 16 ga. liner, 16 ga. front | |

Enclosure Color (see Color Chart):

- | | | | |
|---|--------------------------------|------------------------------------|-------------------------------|
| <input type="checkbox"/> Prime (Standard) | <input type="checkbox"/> Ivory | <input type="checkbox"/> Bronze | <input type="checkbox"/> Gray |
| <input type="checkbox"/> Beige | <input type="checkbox"/> White | <input type="checkbox"/> Dark Gray | |

Performance

Steam
Pressure: _____ psi
Entering Air Temp: _____ °F
Rating: _____ Btu/Hr

Hot Water
Avg. Water Temp.: _____ °F
Water Flow Rate: _____ GPM
Entering Air Temp: _____ °F
Rating: _____ Btu/Hr

Options

Dampers

- | | |
|--|---|
| <input type="checkbox"/> None (Standard) | <input type="checkbox"/> Security Allen Key |
| <input type="checkbox"/> Standard Knob | |

Grill

- | | |
|--|--|
| <input type="checkbox"/> Louvered (Standard) | <input type="checkbox"/> Bar Grill - Aluminum (Inlet/Outlet) |
| <input type="checkbox"/> Perforated (Inlet/Outlet) | <input type="checkbox"/> Arched Inlet/Louvered Outlet |

Fasteners

- | | |
|--|----------------------------------|
| <input type="checkbox"/> Phillips (Standard) | <input type="checkbox"/> Spanner |
|--|----------------------------------|

End Pockets

- | | | |
|------------------------------------|-------------------------------------|--|
| <input type="checkbox"/> Left Hand | <input type="checkbox"/> Right Hand | <input type="checkbox"/> Left & Right Hand |
|------------------------------------|-------------------------------------|--|

Insulation

- | | | |
|-------------------------------|-------------------------------|---|
| <input type="checkbox"/> None | <input type="checkbox"/> Back | <input type="checkbox"/> Sides, Back, & Top |
|-------------------------------|-------------------------------|---|

Other: _____

AIR13-413

Model FL Flat-Top Floor Mounted

Access Doors

- Available in any of the standard numbered locations illustrated.
- Hinged on the top of the convector with a piano type hinge.
- Located in end pockets on convectors with end pockets.
- Fasten with cam-type locking device.


Access Doors Location

- 3 4
 1 2
 5 6

Access Door Hardware

- Slot Head (Standard)
 Security Allen Key Latch
 Security Spanner Head Latch

Convector Access Door Locations:

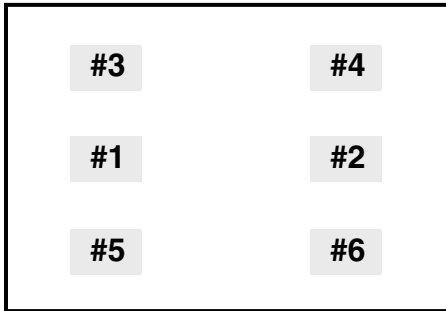

Model	Unit Height	Unit Lengths	# of Doors Available	Available Locations ^①	Door Size
FL	14"	Less than 32"	1	3, 4, 5, 6	4"H x 5"W
		18"	Less than 32"	2	
	32" and longer		4	3, 4, 5, 6	
	20" and over	Less than 32"	2	1, 2 or 3, 5 or 4, 6	5"H x 5"W
			4	1, 2, 3, 5 or 1, 2, 4, 6	
		32" and longer	6	1, 2, 3, 4, 5, 6	

^① Access Doors are not available in locations 5 and 6 with arched inlet.