

SUBMITTAL DATA convector model RL


Model RL Semi-Recessed Wall Mounted

Job Name and Location _____ Date _____

Architect _____ Engineer _____ Sheet _____ of _____

Contractor _____ Order No. _____

Submitted by _____

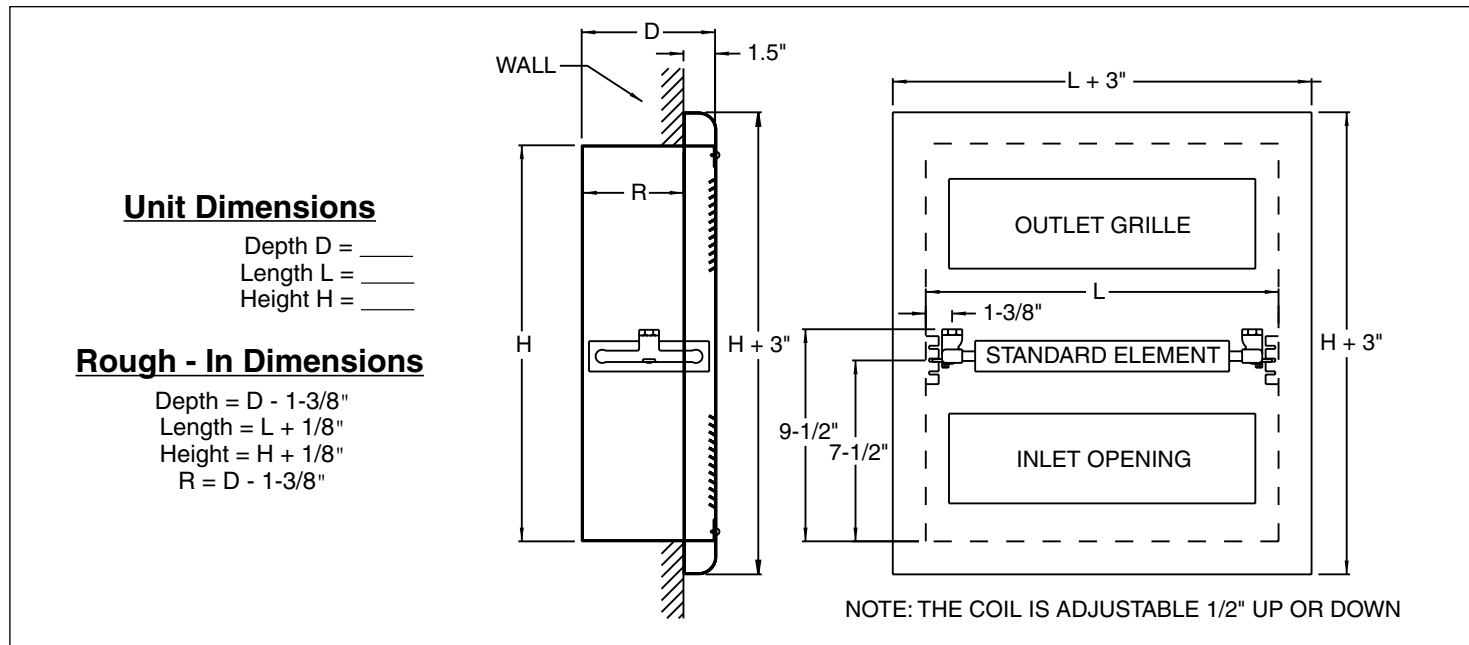

Heating Element

Copper tube mechanically fastened to 0.010" aluminum fins.

- Element to have a nominal depth of:
- 4" w/ 2 tubes 6" w/ 3 tubes 6" w/ 4 tubes

Standard cast brass headers with top and bottom connections

- Optional reverse header connections

Enclosure Specifications

- Dimensions specified above
- Enclosure metal gauge:
- | | |
|--|---|
| <input type="checkbox"/> 20 ga. liner, 18 ga. front (Standard) | <input type="checkbox"/> 20 ga. liner, 14 ga. front |
| <input type="checkbox"/> 18 ga. liner, 18 ga. front | <input type="checkbox"/> 18 ga. liner, 14 ga. front |
| <input type="checkbox"/> 20 ga. liner, 16 ga. front | <input type="checkbox"/> 16 ga. liner, 14 ga. front |
| <input type="checkbox"/> 18 ga. liner, 16 ga. front | <input type="checkbox"/> 14 ga. liner, 14 ga. front |
| <input type="checkbox"/> 16 ga. liner, 16 ga. front | |

- Enclosure Color (see Color Chart):
- | | | | |
|---|--------------------------------|------------------------------------|-------------------------------|
| <input type="checkbox"/> Prime (Standard) | <input type="checkbox"/> Ivory | <input type="checkbox"/> Bronze | <input type="checkbox"/> Gray |
| <input type="checkbox"/> Beige | <input type="checkbox"/> White | <input type="checkbox"/> Dark Gray | |

Performance

Steam
Pressure: _____ psi
Entering Air Temp: _____ °F
Rating: _____ Btu/Hr

Hot Water
Avg. Water Temp.: _____ °F
Water Flow Rate: _____ GPM
Entering Air Temp: _____ °F
Rating: _____ Btu/Hr

Options

- Dampers**
- None (Standard) Security Allen Key
- Standard Knob
- Grill**
- Louvered (Standard) Bar Grill - Aluminum (Inlet/Outlet)
- Perforated (Inlet/Outlet) Arched Inlet/Louvered Outlet
- Fasteners**
- Phillips (Standard) Spanner
- End Pockets**
- Left Hand Right Hand Left & Right Hand
- Insulation**
- None Back Sides, Back, & Top
- Overlap**
- 4-Sided Overlap (Standard) 3-Sided Overlap

Other: _____

AIR13-415

Model RL Semi-Recessed Wall Mounted

Access Doors

- Available in any of the standard numbered locations illustrated.
- Hinged on the top of the convector with a piano type hinge.
- Located in end pockets on convectors with end pockets.
- Fasten with cam-type locking device.


Access Doors Location

- 3 4
 1 2
 5 6

Access Door Hardware

- Slot Head (Standard)
 Security Allen Key Latch
 Security Spanner Head Latch

Convector Access Door Locations:

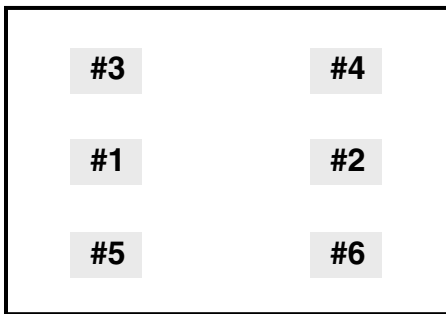

Model	Unit Height	Unit Lengths	# of Doors Available	Available Locations ^①	Door Size
RL	14"	All Lengths	0	None	N/A
	18"	Less than 32"	1	3, 4, 5, 6	4"H x 5"W
			2	3, 5 or 4, 6	
		32" and longer	4	3, 4, 5, 6	
	20" or 24"	Less than 32"	1	1, 2, 3, 4, 5, 6	
			2	1, 2 or 3, 5 or 4, 6	
		32" and longer	4	3, 4, 5, 6	
	26" or 32"	Less than 32"	2	1, 2 or 3, 5 or 4, 6	5"H x 5"W
			4	1, 2, 3, 5 or 1, 2, 4, 6	
		32" and longer	6	1, 2, 3, 4, 5, 6	

^① Access Doors are not available in locations 5 and 6 with arched inlet.